

FORM PTO-1390
(REV. 9-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

240.301

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

10/031956

INTERNATIONAL APPLICATION NO.

PCT/SE00/01520

INTERNATIONAL FILING DATE

28 July 2000

PRIORITY DATE CLAIMED

2 August 1999

TITLE OF INVENTION

METHOD AND DEVICE FOR THE MANUFACTURE OF
CORRUGATED MATERIAL

APPLICANT(S) FOR DO/EO/US


Anders Jönsson, Jacob Volckerts, and Jörgen Ingvarsson

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto. (International application was published in English)
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). (Do not enter. Preliminary amendment presents these amendments)

Items 11 to 20 below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
 1. Notice confirming transmittal of PCT application.
 2. International Preliminary Examination Report PCT/IPEA/409
 3. Written Opinion
 4. International Search Report
 5. Hansson Thyresson PCT amendment letter

U.S. APPLICATION NO. 10/031956 INTERNATIONAL APPLICATION NO. PCT/SE00/01520		ATTORNEY'S DOCKET NUMBER 240.301																										
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		CALCULATIONS PTO USE ONLY																										
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$ 890.00																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 20%;">RATE</th> <th style="width: 20%;">\$</th> </tr> </thead> <tbody> <tr> <td>Total claims</td> <td>15 - 20 =</td> <td>0</td> <td>x \$18.00</td> <td>\$ 0.00</td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td>0</td> <td>x \$84.00</td> <td>\$ 0.00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$280.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$</td> </tr> </tbody> </table>		CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	15 - 20 =	0	x \$18.00	\$ 0.00	Independent claims	2 - 3 =	0	x \$84.00	\$ 0.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	TOTAL OF ABOVE CALCULATIONS =				\$	\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																								
Total claims	15 - 20 =	0	x \$18.00	\$ 0.00																								
Independent claims	2 - 3 =	0	x \$84.00	\$ 0.00																								
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00																								
TOTAL OF ABOVE CALCULATIONS =				\$																								
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.		\$ 445.00																										
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$																										
TOTAL NATIONAL FEE =		\$ 445.00																										
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +		\$ 40.00																										
TOTAL FEES ENCLOSED =		\$ 485.00																										
		Amount to be refunded: \$																										
		charged: \$																										
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>485.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>12-1087A</u> duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.																												
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.																												
SEND ALL CORRESPONDENCE TO. John R. Ley, Esq. JOHN R. LEY, LLC 5299 DTC Blvd., Suite 610 Greenwood Village, CO 80111																												
		SIGNATURE  John R. Ley NAME																										
		<u>27,453</u> REGISTRATION NUMBER																										

PATENT/TRADEMARK
Attorney Docket No. 240.301
Express Mail Label No. EL894817693US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of)
Anders Jönsson, Jacob Volckerts,)
and Jörgen Ingvarsson)
) Group Art Unit:
Serial No.)
Filed: Concurrently Herewith)
) Examiner:
International Application No.: PCT/SE00/01520)
International Filing Date: 28 July 2000)
)
For: Method and Device for the)

Manufacture of Corrugated Material)

Preliminary Amendment

Honorable Commissioner
of Patents and Trademarks
Washington, D.C. 20231

Sir:

Please enter the following amendments arising from international preliminary examination and to place the application in better form for U.S. examination.

Amend the claims into the clean form appearing in Part 1 below. Changes to claims 1 and 6 as shown by the marked copy of the claims appearing in Part 2 below. Part 3 contains certain remarks concerning this Preliminary Amendment.

PART 1 - CLEAN CLAIMS

1. Method for the manufacture of corrugated material, at least one first plane sheet (19; 20) and one second sheet (16) of plastic material arranged in wave shape being brought together for adhesion to each other and the wave-shaped sheet (16) running over core bars (17, 18), *characterized* in
5 that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16),
that a portion of at least one sheet is heated at abutment against the core bars (17, 18),
that the first sheet (19; 20) is brought to abutment against the second sheet (16)
10 for welding the sheets (16; 19, 20) together and
that energy is supplied locally to contact surfaces of abutting sheet portions.
2. Method according to claim 1, wherein at least one portion of at least one of the sheets (16; 19, 20) is heated directly in a contact surface between adjacent sheets (16; 19, 20) with heating members (28) arranged in the core bars (17, 18).
3. Method according to claim 1, wherein at least one portion of at least one sheet is heated indirectly with heating members (28) arranged at a distance from the core bars (17, 18).
4. Method according to claim 1, wherein the second sheet (16) arranged in wave shape is corrugated before it reaches the core bars (17, 18).
5. Method according to claim 1, wherein the first sheet (19; 20) and the second sheet (16) are pressed together against each other between a line of core bars (17, 18) and at least one press roll (21; 22).
6. Device for the manufacture of corrugated material, first members being arranged for feeding at least one first plane sheet and one second sheet of plastic material arranged in wave shape and running over core bars (17, 18) and second members being arranged for bringing together and adhering the sheets,
5 *characterized* in

- that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16),
- that heating members (28) are arranged for transferring heat locally to contact surfaces of a portion of at least one sheet (16; 19, 20) abutting against the core bars and including plastic material
- 10 that guide members (17, 18; 21; 22) are arranged for bringing together the first and the second sheet in an abutment portion and for welding together in the portion heated by the heating members (28).

7. Device according to claim 6, wherein the core bars (17, 18) comprise heating members (28) for direct heating of at least the sheet (16) which is corrugated.

8. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the abutment portion.

9. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the core bars (17, 18), so that the same are heated.

10. Device according to claim 6, wherein corrugation members (14; 15) are arranged for the corrugation of the second sheet (16), before the second sheet (16) reaches the core bars (17, 18).

11. Device according to claim 10, wherein the corrugation member (14; 15) comprise an upper plate (14) made with alternating recesses and ridges and a lower plate (15) made with alternating recesses and ridges adapted to the upper plate (14).

12. Device according to claim 6, wherein the core bars (17, 18) are made with a larger length in the central portion of the sheet and with a shorter length in the cross-direction of the sheet out from the central portion while forming the corrugation member (14; 15).

13. Device according to claim 6, wherein the core bars (17, 18) comprise electric resistance wire for heating material sheets (16; 19; 20) adjacent to the core bars (17, 18).

14. Device according to claim 6, wherein the core bars (17, 18) are arranged in an upper line (17) and a lower line (18).

15. Device according to claim 14, wherein at least a third set of core bars (29) are arranged in a line between the upper line (17) and the lower line (18).

PART 2 - MARKED VERSION OF CLAIMS SHOWING AMENDMENTS

1. Method for the manufacture of corrugated material, at least one first plane sheet (19; 20) and one second sheet (16) of plastic material arranged in wave shape being brought together for adhesion to each other and the wave-shaped sheet (16) running over core bars (17, 18), *characterized* in that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16).

that a portion of at least one sheet is heated at abutment against the core bars (17, 18) and

that the first sheet (19; 20) is brought to abutment against the second sheet (16) for welding the sheets (16; 19, 20) together and

that energy is supplied locally to contact surfaces of abutting sheet portions.

2. Method according to claim 1, wherein at least one portion of at least one of the sheets (16; 19, 20) is heated directly in a contact surface between adjacent sheets (16; 19, 20) with heating members (28) arranged in the core bars (17, 18).

3. Method according to claim 1, wherein at least one portion of at least one sheet is heated indirectly with heating members (28) arranged at a distance from the core bars (17, 18).

4. Method according to claim 1, wherein the second sheet (16) arranged in wave shape is corrugated before it reaches the core bars (17, 18).

5. Method according to claim 1, wherein the first sheet (19; 20) and the second sheet (16) are pressed together against each other between a line of core bars (17, 18) and at least one press roll (21; 22).

6. Device for the manufacture of corrugated material, first members being arranged for feeding at least one first plane sheet and one second sheet of plastic material arranged in wave shape and running over core bars (17, 18) and second members being arranged for bringing together and adhering the sheets, *characterized* in

that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16).

that heating members (28) are arranged for transferring heat locally to contact surfaces of a portion of at least one sheet (16; 19, 20) abutting against the core bars and including plastic material.

that guide members (17, 18; 21; 22) are arranged for bringing together the first and the second sheet in an abutment portion and for welding together in the portion heated by the heating members (28).

7. Device according to claim 6, wherein the core bars (17, 18) comprise heating members (28) for direct heating of at least the sheet (16) which is corrugated.

8. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the abutment portion.

9. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the core bars (17, 18), so that the same are heated.

10. Device according to claim 6, wherein corrugation members (14; 15) are arranged for the corrugation of the second sheet (16), before the second sheet (16) reaches the core bars (17, 18).

11. Device according to claim 10, wherein the corrugation member (14; 15) comprise an upper plate (14) made with alternating recesses and ridges and a lower plate (15) made with alternating recesses and ridges adapted to the upper plate (14).

12. Device according to claim 6, wherein the core bars (17, 18) are made with a larger length in the central portion of the sheet and with a shorter length in the cross-direction of the sheet out from the central portion while forming the corrugation member (14; 15).

13. Device according to claim 6, wherein the core bars (17, 18) comprise electric resistance wire for heating material sheets (16; 19; 20) adjacent to the core bars (17, 18).

14. Device according to claim 6, wherein the core bars (17, 18) are arranged in an upper line (17) and a lower line (18).

15. Device according to claim 14, wherein at least a third set of core bars (29) are arranged in a line between the upper line (17) and the lower line (18).

PART 3 - REMARKS

These amendments should place the application in form for U.S. examination. No new matter has been added. The substantive amendments have been taken from amendments approved during the prior PCT examination. These amendments were accepted by the PCT examiner, and the claims were determined to be patentable under PCT standards, as is apparent from the Notification of Transmittal of the International Preliminary Examination Report, enclosed herewith.

The examiner is encouraged to telephone the undersigned for the purposes of resolving any issues which would inhibit the immediate allowance of the application.

Respectfully submitted,

Date: 1/22/02

By: 

John R. Ley
Registration No. 27, 453
ATTORNEY FOR APPLICANT

JOHN R. LEY, LLC
5299 DTC Blvd., Suite 610
Englewood, Colorado 80111-3321
Telephone: (303) 740-9000
Facsimile: (303) 740-9042

METHOD AND DEVICE FOR THE MANUFACTURE
OF CORRUGATED MATERIAL

FIELD OF INVENTION

5

The invention relates to a method and a device for the manufacture of corrugated material, at least one first plane sheet and one second sheet of plastic material arranged in wave shape being brought together for adhesion to each other and the wave-shaped sheet running over core bars. First members are arranged for feeding at least one plane sheet and one second sheet of plastic material running over the core bars and second members are arranged for bringing together and adhering the sheets.

PRIOR ART

Since long, different forms of corrugated board have been manufactured and used, above all for packing and the like. Corrugated board has very good insulating and shock-absorbing properties, but it is also impaired by a plurality of disadvantages. The largest disadvantage is, perhaps, the bad moist-resistance thereof. When corrugated board becomes damp, it loses a large part of the supporting capacity and durability thereof.

It is also known, per se, to form sheets of plastic material to wave shape and connect such wave-shaped sheets with plane sheets of similar material. An example of this is shown and described in US-A-4897146. The sheet that is to be wave-shaped is heated by particular heating members, making the material plastic. The material is then formed to wave shape with core bars and one side of the wave-shaped material is pressed against a pre-heated plane sheet by a forming drum, which is made with recesses being ring-shaped and adapted to the core bars. An additional plane sheet is heated in the similar way and is pressed against the other side of the wave-shaped material by a second preferably cooled drum.

The material that the sheets are made of is relatively stiff and the thickness of the sheets is such that at least the sheet that is to be wave-shaped has to be

heated to such a high temperature that the material becomes plastic. When the joined sheets have cooled, the result is a corrugated sheet material, which, e.g., may be used as roof or wall panels. The device and method according to US-A-4897146 works well for the intended purpose, but is less suitable for other
5 purposes, e.g. for the manufacture of corrugated material for packing and the like.

THE INVENTION IN SUMMARY

An object of the invention is to provide a method for the manufacture of corrugated material of a plurality of material sheets, which are brought over core bars and heated and joined together in an effective way. An additional object is to
10 provide a device for the manufacture of corrugated material of at least one first sheet and one second sheet. These objects are attained by the invention having received the features mentioned in claim 1 and claim 6, respectively.

According to the method, at least one sheet is heated at abutment against the core bars, the first and the second sheet abutting against each other at the
15 heating.

The device comprises heating members for the transfer of heat from the core bars to at least one sheet abutting against the core bars and comprising plastic material, and guide members for bringing together the first and the second sheet at the heating.

By the invention, the use of a plurality of different materials for the different layers in the corrugated product is enabled. Materials of different stiffness, toughness, friction and shock-absorption may, e.g., be chosen. The invention also enables a faster process start up without any extensive heating of drums or the like. A manufacturing process may also be finished faster and be temporarily
20 stopped.
25

The finished product has a plurality of the advantages of the corrugated cardboard, such as very good insulating and shock-absorbing properties, but has in addition higher moist-resistance and durability. Furthermore, packages having been manufactured of the finished product may be spray steam heated. Such
30 packages neither emit dust particles. A material suitable in connection with the

invention is blown polyethylene film with chalk as filler. For many applications, it is suitable with a film thickness in the range of 0,03-0,4 mm.

Packages and other products that have been produced according to the invention are especially suitable in the food industry. Also in the pharmaceutical
5 industry and the medical field, it may be advantageous to use the invention.

SHORT DESCRIPTION OF THE DRAWINGS

The invention will now be described closer by embodiment examples, reference being made to the accompanying drawings, where
fig. 1 is a side view of an embodiment of the device according to the invention,
10 fig. 2 is a cross-sectional view, which shows how a corrugated material according to a first embodiment is produced,
fig. 3 is a cross-sectional view, which shows how a corrugated material according to a second embodiment is produced,
fig. 4 is a cross-sectional view, which shows how a corrugated material according
15 to a third embodiment is produced,
fig. 5 is a cross-sectional view, which shows how a corrugated material according to a fourth embodiment is produced,
fig. 6 is a longitudinal section view from the line A-A in fig. 7 of member for corrugation of the material and
20 fig. 7 is a cross-sectional view from the line B-B in fig. 6 of the member in fig. 6.

THE INVENTION

Fig. 1 shows in principal how a manufacturing line, which operates according to the invention, may be made. A first part A, which is shown with dash and dot lines, comprises a first roll 10, a second roll 11 and a third roll 12, all
25 winded up with a suitable sheet material, as well as conventional sheet stretching members 13. The different sheet materials are brought together in a second part B and form different layers of the finished corrugated material. It should be observed that material thickness, mutual distance between different components and other geometrical relations in fig. 1 as well as subsequent figures are not true to scale. A

plurality of dimensions and distances have been changed in relation to real conditions in order to show features of the invention more clearly.

The elements that are included in part A may all be made according to prior art. However, it is important to notice that various sheet materials, both thickness
5 and the material as such, may be arranged on the different rolls. For most applications, it is suitable to use polyethylene (PE) and polypropylene (PP) with or without so called fillers. A suitable filler may be chalk.

Within the scope of the invention, entirely other materials may also be used. For instance, it is possible to use aluminum or other similar material in some layer
10 in order to achieve high tightness against gas permeation. Materials that in itself cannot be heated together with the material of an adjacent sheet should be coated with or arranged next to a plastic layer.

The sheet or sheets 16 that are to be corrugated or formed in wave shape are preferably wider and rolled on wider rolls than other sheets, so that the
15 finished corrugated material comprises equally wide layers. If the sheet 16 is narrower, it will be stretched during the corrugation. Before this sheet 16 is brought together with other sheets, it is suitably corrugated in a corrugation device. In the embodiment shown, the corrugation device comprises an upper plate 14 and a lower plate 15, which is described closer reference being made to
20 figs. 6 and fig. 7. An alternative embodiment of a corrugation device comprises two cylinders. In such an embodiment, it may be suitable with pre-heating of the sheet 16 before the corrugation and then cooling of the sheet 16 afterwards.

After the corrugation device, the corrugated sheet 16 is led in between at least one set of upper core bars 17 and one set of lower core bars 18. These are
25 described further below, reference being made to figs. 2-5. An upper sheet 19 from the first roll 10 and a lower sheet 20 from the third roll 12 are brought together with the corrugated sheet 16 at the core bars 17 and 18. The core bars 17 and 18 extend in the common long direction V of the sheets, which is indicated at the corresponding arrow in fig. 1. In certain applications, the corrugation device may

be omitted or be integrated with the core bars. The two sets of core bars 17 and 18 are suspended behind or outside the sheets in a way not shown closer.

The sheets are heated by the core bars 17 and 18 and joined together to a corrugated sheet material through co-operation with an upper press roll 21 and a lower press roll 22. After the joining, the ready-formed sheet material is brought further in the direction of the arrow V in a conventional way by an advancing upper driving roll 23 and an advancing lower driving roll 24. The upper press roll 21 and the lower press roll 22 may in some embodiments together advance the sheet material in a desired way. In such a case, the driving rolls 23 and 24 may be omitted.

The driving rolls 23 and 24 are included in a third part C, which in a conventional way may comprise at least one guide roller 25 and one cutting mechanism. In the embodiment shown, the cutting mechanism comprises an upper knife 26 and a lower knife 27 co-operating therewith. The knives 26 and 27 suitably move up and down and cut off the sheet material in sheets of suitable length. Additional cutting devices cut the sheets to desired width. The size of the sheets is, to a large extent, dependent on the application for which they are intended. The third part C constitutes not in itself part of the invention and may be given another design depending on the application in question.

In fig. 2, an example is shown of how the core bars may be arranged when a sheet material having three layers, one of which is corrugated, is to be produced. In this case, an upper line of core bars 17 is arranged with a certain mutual distance between adjacent core bars. A lower line of core bars 18 is arranged with the same mutual distance, but displaced in relation to the upper line, so that the space between the core bars is filled out with space for an intermediate sheet of material.

All core bars have, in this embodiment, triangular cross-section, but other shapes may be chosen depending on the application in question. The sheet 16 that is to be corrugated runs between the upper line of core bars 17 and the lower line of core bars 18. The upper sheet 19 runs exactly above the upper line of core

bars 17 and will be pressed against the sheet 16 between the lower line of core bars 18 and the upper press roll 21. Correspondingly, the lower sheet 20 runs exactly below the lower line of core bars 18 and will be pressed against the sheet 16 between the upper line of core bars 17 and the lower press roll 22.

5 The pressure that is effected by the press rolls 21 and 22 may in an alternative embodiment be generated by difference in ambient pressure or by the fact that the material in the sheets is stretched in the latitudinal direction. In such a case, the press rolls 21 and 22 may be omitted. An additional alternative to the press rolls 21 and 22 may be reciprocating press plates. The press plates are
10 quickly brought towards the core bars and press together a portion of the sheets in the way described above during the phase when the sheets are welded together. Next, the press plates are retracted, so that the sheets may be fed forwards and a new portion of the sheets comes in the correct position for welding together.

 At least parts of the portions of the core bars 17 and 18 which abut against
15 the sheet 16 and/or the upper sheet 19 and/or the lower sheet 20 are provided with heating members 28. By the heating members 28, heat is transferred to abutting and adjacent material sheets to such an extent that a joining of the sheets is achieved. The heating is local in smaller contact surfaces, which means that the desired temperature may be attained fast. In a preferred embodiment, the joining
20 takes place in connection with the press rolls 21 and 22 driving the sheets forwards and, consequently, the sheets being in motion. In the other parts, the core bars 17 and 18 are not heated.

 In a simple embodiment, the heating member 28 comprises electric heating conductors, which extend in the longitudinal direction of the core bars and which
25 are supplied from conventional power supply units (not shown). It is also possible to transmit heat to abutting sheet portions in another way. The requisite energy may, e.g., be supplied to the contact surfaces through ultrasound, laser and other similar forms of energy permitting local or directed transmission of energy. The transmission of energy may also take place inductively or in a similar way and then
30 be concentrated in the core bars 17 and 18, so that heating takes place locally.

As mentioned above, there may be different material compositions in the different sheets. Aluminium foil or a similar material may be used in some layer. In certain applications, it is suitable to use an intermediate layer, e.g. the sheet 16, with a lot of filler and two outer layers with less filler. Thereby, a sheet material is effected, which resists high load in the channel direction at the same time as the outer layers are very elastic. Such a sheet material is very suitable for use to packaging.

The material thickness may also vary in the different layers and according to the application in question. The sheet 16 that is to be corrugated may in that connection be made in a considerably thicker and stronger material than the other layers in order to obtain very good properties as for durability and impact resistance. In the same way, also other layers may be given desired properties as for, e.g., durability and impact resistance.

Fig. 3 shows an alternative embodiment with a third set of core bars 29 inserted between the upper line of core bars 17 and the lower line of core bars 18. The third line of core bars 29 has a cross-section adapted to other core bars and is provided with a second set of heating members 28' and 28". In the embodiment shown, the core bars 29 are made with square cross-section. Also the sheet which is to be corrugated is doubled in an upper corrugation sheet 16 and a lower corrugation sheet 16'. The double heating members 28' and 28" enable, together with the heating members 28 of the upper core bars 17 and the lower core bars 18, the composition of a more complex sheet material. As is seen in fig. 3, the result is two outer plane layers and two inner corrugated layers.

Fig. 4 shows a simplified embodiment with only two material sheets. A lower sheet 20 is plane and a sheet 16 is corrugated in the same way as has been described above. In fig. 5, an alternative embodiment is shown with a first corrugated sheet 16 and a second corrugated sheet 16'. In other respects, the embodiments according to fig. 4 and fig. 5 equal the embodiments described above.

The section view in fig. 6 schematically shows how a device for corrugation of the sheet 16 may be made. A lower plate 15 is V-shaped with the sheet 16 moving towards the tip of the plate. The sheet 16 moves in the direction of the arrow V. The plate 15 is made with alternating v-shaped recesses and v-shaped
5 ridges. The device for corrugation may be entirely omitted, if the resulting sheet material is not too wide. An upper plate 14 (see fig. 7) with a corresponding shape fits into the recesses and ridges, respectively, of the lower plate 15.

The embodiment of the device for corrugation is seen more clearly in fig. 7. The v-shaped recesses and ridges, respectively, are clearly shown in the figure.
10 The shape of the recesses and of the ridges, respectively, is adapted to the shape of the core bars, so that the sheet is corrugated in the desired way, before it reaches the core bars. By virtue of the V-shape of the sheets 14 and 15, the sheet 16 will start to corrugate in a central portion. The sheet 16 is then corrugated outwards towards the sides from the central portion as the sheet fed forwards.
15 Thereby, too large a load on the sheet material during the corrugation process is avoided.

According to an alternative embodiment, the core bars are arranged in the same V-shape as the sheets 14 and 15 shown in fig. 6, which thereby may be omitted.

CLAIMS

1. Method for the manufacture of corrugated material, at least one first plane sheet (19; 20) and one second sheet (16) of plastic material arranged in wave shape being brought together for adhesion to each other and the wave-shaped sheet (16) running over core bars (17, 18), *characterized* in

- that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16),
- 10 that a portion of at least one sheet is heated at abutment against the core bars (17, 18),
- that the first sheet (19; 20) is brought to abutment against the second sheet (16) for welding the sheets (16; 19, 20) together and
- 15 that energy is supplied locally to contact surfaces of abutting sheet portions.

2. Method according to claim 1, wherein at least one portion of at least one of the sheets (16; 19, 20) is heated directly in a contact surface between adjacent sheets (16; 19, 20) with heating members (28) arranged in the core bars (17, 18).

3. Method according to claim 1, wherein at least one portion of at least one sheet is heated indirectly with heating members (28) arranged at a distance from the core bars (17, 18).

25

4. Method according to claim 1, wherein the second sheet (16) arranged in wave shape is corrugated before it reaches the core bars (17, 18).

5. Method according to claim 1, wherein the first sheet (19; 20) and the second sheet (16) are pressed together against each other between a line of core bars (17, 18) and at least one press roll (21; 22).

5 6. Device for the manufacture of corrugated material, first members being arranged for feeding at least one first plane sheet and one second sheet of plastic material arranged in wave shape and running over core bars (17, 18) and second members being arranged for bringing together and adhering the sheets, *characterized* in

10

that the core bars (17, 18) extend in the longitudinal direction of the wave-shaped sheet (16),

that heating members (28) are arranged for transferring heat locally to contact surfaces of a portion of at least one sheet (16; 19, 20) abutting against the core bars and including plastic material

15

that guide members (17, 18; 21; 22) are arranged for bringing together the first and the second sheet in an abutment portion and for welding together in the portion heated by the heating members (28).

20

7. Device according to claim 6, wherein the core bars (17, 18) comprise heating members (28) for direct heating of at least the sheet (16) which is corrugated.

25

8. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the abutment portion.

9. Device according to claim 6, wherein heating members (28) are arranged at a distance from the core bars (17, 18) for transfer of energy to the core bars (17, 18), so that the same are heated.

5 10. Device according to claim 6, wherein corrugation members (14; 15) are arranged for the corrugation of the second sheet (16), before the second sheet (16) reaches the core bars (17, 18).

10 11. Device according to claim 10, wherein the corrugation member (14; 15) comprise an upper plate (14) made with alternating recesses and ridges and a lower plate (15) made with alternating recesses and ridges adapted to the upper plate (14).




15 12. Device according to claim 6, wherein the core bars (17, 18) are made with a larger length in the central portion of the sheet and with a shorter length in the cross-direction of the sheet out from the central portion while forming the corrugation member (14; 15).

20 13. Device according to claim 6, wherein the core bars (17, 18) comprise electric resistance wire for heating material sheets (16; 19; 20) adjacent to the core bars (17, 18).

25 14. Device according to claim 6, wherein the core bars (17, 18) are arranged in an upper line (17) and a lower line (18).

 15. Device according to claim 14, wherein at least a third set of core bars (29) are arranged in a line between the upper line (17) and the lower line (18).

1/2

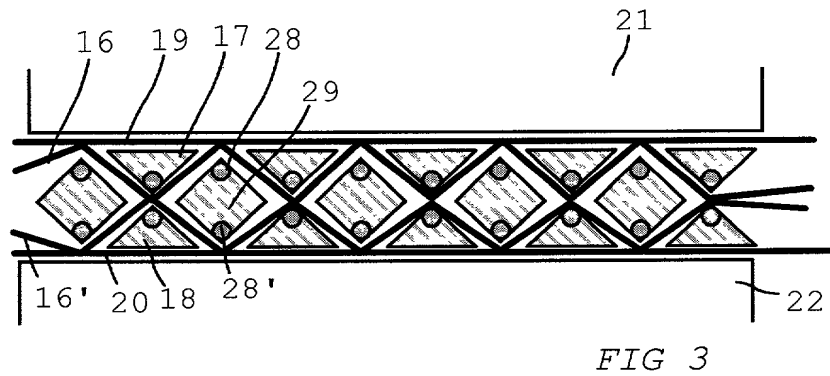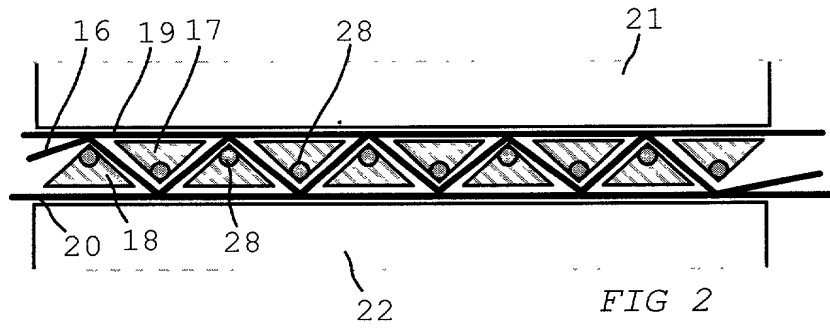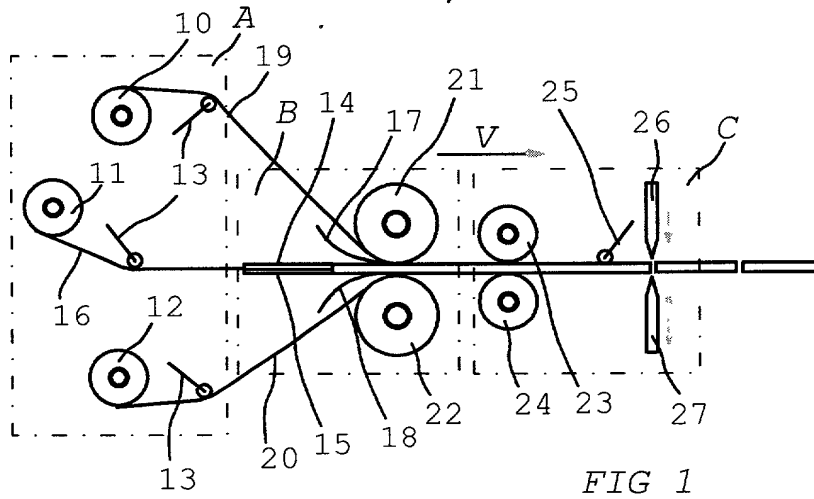

2/2

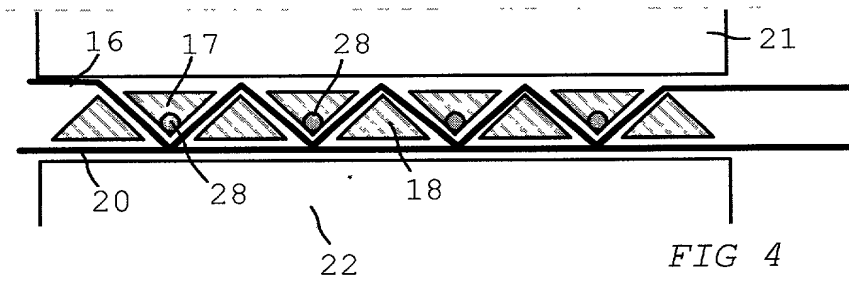


FIG 4

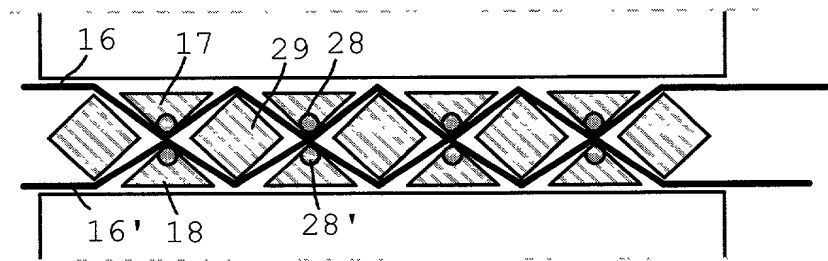


FIG 5

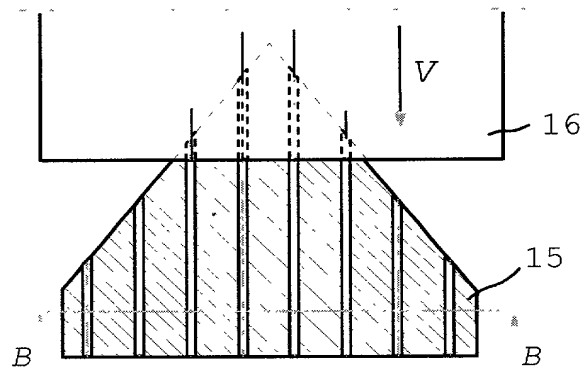


FIG 6

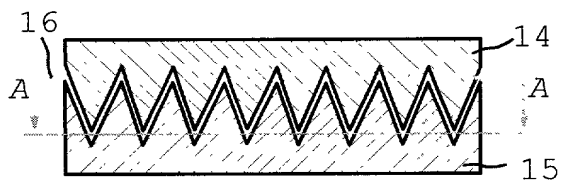


FIG 7

**COMBINED DECLARATION AND POWER
OF ATTORNEY FOR PATENT APPLICATION**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND DEVICE FOR THE MANUFACTURE OF CORRUGATED MATERIAL, the specification of which is attached hereto, and which is assigned Attorney Docket No. 240.301 by my below-named attorneys.

The persons named as joint inventors are: Anders Jönsson, Jacob Volckerts, and Jörgen Ingvarsson.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability as defined in CFR 37 § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) and 365(b) of the foreign applications for patent listed below:

International Application No. PCT/SE00/01520 filed July 28, 2000; and
Swedish Patent Application No. SE 9902826-8 filed August 2, 1999.

Power of Attorney: As the named inventor, I hereby appoint John R. Ley, Registration No. 27,453, and L. Jon Lindsay, Registration No. 36,855, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Send all correspondence to: John R. Ley, 5299 DTC Boulevard, Suite 610, Greenwood Village, Colorado 80111, and direct telephone calls to John R. Ley at (303) 740-9000, and direct facsimiles to John R. Ley at (303) 740-9042.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

100 Full name of first joint inventor: Anders Jönsson

Post Office Address: Erik Dahlbergsgatan 58
S-254 40 HELSINGBORG, SWEDEN

Residence Address: Erik Dahlbergsgatan 58 *SEK*
S-254 40 HELSINGBORG, SWEDEN

Inventor's Signature 

Date: 2002-01-10 Citizenship: Sweden

200
Full name of third joint inventor: Jörgen Ingvarsson

Post Office Address: Strandgatan 3
S-262 32 ÄNGELHOLM, SWEDEN

Residence Address: Strandgatan 3
S-262 32 ÄNGELHOLM, SWEDEN


Inventor's Signature [Signature]

Date: 2002-01-10 Citizenship: Sweden

Full name of second joint inventor: Jacob Volckerts

Post Office Address: Hjälmskultsgatan 14 A
S-254 41 HELSINGBORG, SWEDEN

Residence Address: Hjälmskultsgatan 14 A
S-254 41 HELSINGBORG, SWEDEN

Inventor's Signature 

Date: 2002-01-10

Citizenship: Sweden